



The new degree of comfort.®

# C<sup>o</sup>NDENSING TANKLESS



**RHEEM® PRESTIGE® HIGH EFFICIENCY  
CONDENSING TANKLESS GAS WATER HEATERS**

## THE NEXT LEVEL OF TANKLESS:

- All Models Exceed ENERGY STAR® Requirements
- Indoor Direct Vent with PVC Piping and Outdoor Models
- Rheem Exclusive Water Savings Setting
- Built-in Condensate Neutralizer

# Rheem *Prestige*<sup>®</sup> Condensing Tankless Solutions – Energy Efficient Continuous Hot Water

Preferred by plumbers<sup>1</sup>, Rheem<sup>®</sup> *Prestige*<sup>®</sup> Series Condensing Tankless Water Heaters are packed with business-building features.



## Efficiency

- .93 UEF with stainless steel condensing heat exchanger

## Easy Installation and Service


- **Vent with 2", 3" or 4" PVC**
- Built-in condensate neutralizer
- 1/2" Gas line compatibility up to 24 ft.<sup>2</sup>
- **Exclusive! Maintenance Notice Setting** – Alerts homeowner, after 500 hours of use, to call for service check (optional)
- Self-diagnostic system
- High-altitude capability – up to 8,400 ft. elevation above sea level<sup>3</sup>
- Digital remote control and 10 ft. of thermostat wire included
- Supplied with a 120-volt power cord (indoor models only)

## Performance

- **Industry Best! Low Flow Activation** – Minimum flow rate of .26 GPM and minimum activation flow rate of .40 GPM ensures the user will receive hot water even in low demand situations
- **Recirculation Pump Kit-Ready** – Quickly pairs with our Recirculation Pump kit to provide instantaneous hot water at the tap<sup>4</sup>
- **Exclusive! Hot Start Programming** – Minimizes cold water bursts by staying in ready-fire state for back-to-back hot water needs

## Technology

- **EcoNet<sup>®</sup> Enabled** – all Tankless products from 2010 to present can connect to EcoNet mobile app via Tankless EcoNet Accessory Kit (REWRA630TWH)
- For higher demand, link multiple units to operate as one system:
  - 2 Units: EZ-Link™
  - Up to 6 units: MIC-6 Control Board
  - Up to 20 units: MIC-185 plus MICS-180 manifold control assembly



## Environmentally Friendly


- **Low Emissions** – Ultra low NOx burner meets SCAQMD rule 1146.2 requirements
- **Exclusive! Water Savings Setting** – upon activation, this setting can save homeowners up to 1,100 gallons of water per year<sup>5</sup> by decreasing the flow of water through the pipes until the temperature reaches the heater's set temperature

## Safety

- **Exclusive! Guardian OFW™** **overheat film wrap** – prevents dangerous temperatures and provides industry best side-to-side clearance of 1/2 inch
- **Industry Best!** Freeze protection to -30°F

## Warranty

- 12-Year heat exchanger – residential, 5-year heat exchanger – commercial, 5-year parts and 1-year labor
- See Warranty Certificate for complete information

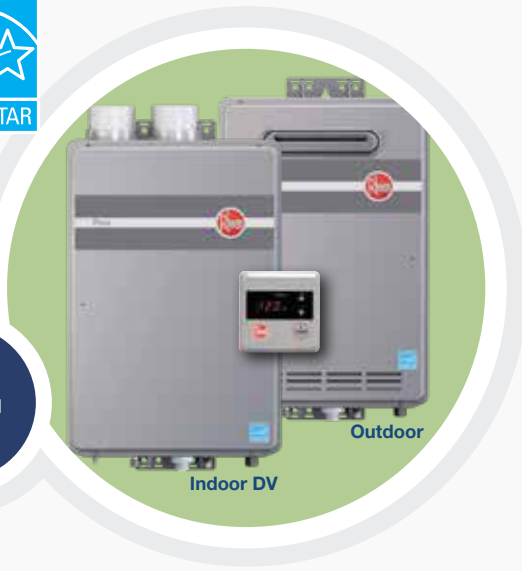

Maximum Water Temperature is 140° F (for applications requiring up to 185° F, see Rheem Commercial Tankless options)

<sup>1</sup> According to a 2015 survey of tankless contractors by Hanover Research on behalf of Rheem.  
<sup>2</sup> Based on Rheem testing of 1/2" gas line with gas supply of 7" w.c. up to 24'; Installation conditions vary; Consult the Rheem<sup>®</sup> Use and Care Manual, the Rheem<sup>®</sup> Gas Piping Facts brochure (TK-GPF-12), the National Fuel Gas Code (NFPA 54, ANSI Z223.1), and any other local gas codes when installing a Rheem Tankless Water Heater.  
<sup>3</sup> Contact customer service for exact altitude rating for each model.  
<sup>4</sup> Pump kit designed for single unit applications only.  
<sup>5</sup> Savings based on DOE test procedures.

## Rheem Tankless Water Heater with EcoNet<sup>®</sup> WiFi Included

### Smart Home Features

- Water leak detection alert and system shut off (indoor models only) – may qualify for insurance discounts
- Mobile alerts for notifications/maintenance reminders
- Mobile gas and water usage reports
- Integration with NEST & WINK smart home systems

### Product Includes

- Factory-installed translator
- Leak detection cable (for indoor models)
- Wi-Fi Module, connection cable and power cord

App available free in App Store and Google Play for Android

ANDROID APP ON  

 Google play


Available on the  

 App Store

### RTGH-DVELN

Indoor Direct Vent with EcoNet<sup>®</sup>  
 11,000-199,900 BTU/h Only  
 (Outdoor model also available)

## Superior Construction and Reliability

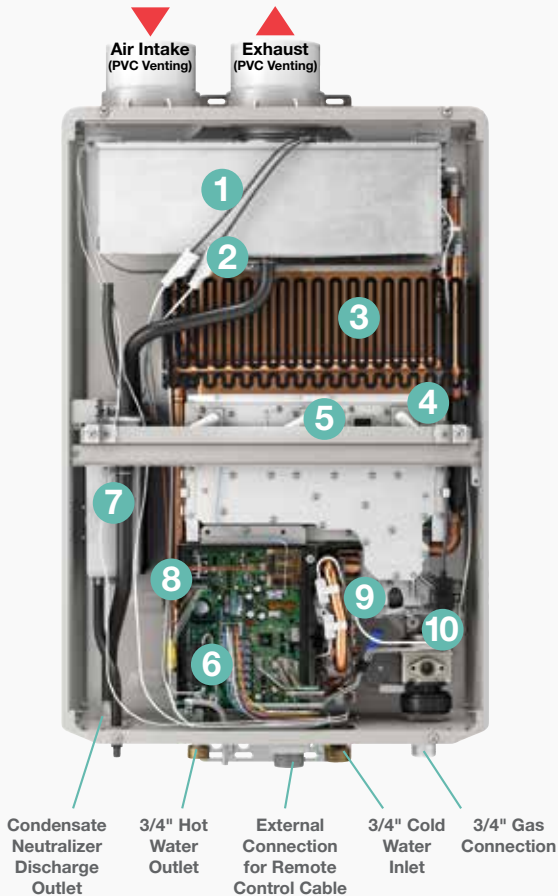

### Indoor Direct Vent

- 1 Stainless Steel Secondary Heat Exchanger
- 2 All-Copper Primary Heat Exchanger
- 3 Over Heat Film Wrap
- 4 Electronic Spark Ignition
- 5 157,000 - 199,900 BTU/h Modulating Burner
- 6 Electronic Control Board
- 7 Condensate Neutralizer
- 8 Variable Speed Fan
- 9 Water Flow Control System
- 10 Modulating Gas Valve

EcoNet® Enabled – All models can connect to EcoNet mobile app via Tankles EcoNet Accessory Kit (REWRA630TWH)

### Outdoor


- 1 Stainless Steel Secondary Heat Exchanger
- 2 All-Copper Primary Heat Exchanger
- 3 Over Heat Film Wrap
- 4 Electronic Spark Ignition
- 5 157,000 - 199,900 BTU/h Modulating Burner
- 6 Electronic Control Board
- 7 Condensate Neutralizer
- 8 Variable Speed Fan
- 9 Water Flow Control System
- 10 Modulating Gas Valve



## Venting Options and Installations



### PVC Vent System




Indoor  
horizontal  
vent  
termination

Indoor  
vertical  
vent  
termination

All indoor tankless units must be vented vertically or horizontally to the outdoors using manufacturer approved venting material. See the installation instructions for each specific model. (ULCS636 Pipe must be used for Canada.)

### Outdoor



Outdoor\*  
recess box  
installation

Outdoor\*  
installation

\*Outdoor units do not require venting materials.

Venting details, including clearances and diagrams can be found in the "Use & Care Manual" of Rheem indoor tankless water heaters.





The new degree of comfort®



Commercial Gas  
Prestige Tankless Water Heaters

## Rheem Prestige® Specifications

| DESCRIPTION                       |                 |                    |                      | FEATURES      |                          |                     |                     |          | ROUGHING IN DIMENSIONS (SHOWN IN INCHES) |     |        |        |       | ENERGY INFO.            |                    |                             |
|-----------------------------------|-----------------|--------------------|----------------------|---------------|--------------------------|---------------------|---------------------|----------|--|-----|--------|--------|-------|-------------------------|--------------------|-----------------------------|
| MODEL NUMBER                      | GAS INPUT BTU/H | TYPE               | NUMBER OF BATHROOMS* | TEMP. RANGE   | MIN. FLOW/ACTIVATION GPM | GPM @ 67° RISE MAX. | GPM @ 45° RISE MAX. | MAX. GPM | CONNECTION                               |     | HEIGHT | WIDTH  | DEPTH | VENT DIAM.              | SHIP WEIGHT (LBS.) | UNIFORM ENERGY FACTOR (UEF) |
|                                   |                 |                    |                      |               |                          |                     |                     |          | WATER                                    | GAS |        |        |       |                         |                    |                             |
| <b>Rheem Prestige® RTGH-95</b>    |                 |                    |                      |               |                          |                     |                     |          |  |     |        |        |       |                         |                    |                             |
| RTGH-95DVLN-1                     | 11,000-199,900  | Indoor Direct Vent | 4                    | 85° to 140° F | 0.26/0.40                | 5.7                 | 8.5                 | 9.5      | 3/4                                      | 3/4 | 27-1/2 | 18-1/2 | 9-3/4 | 2", 3" or 4" PVC 2-Pipe | 82                 | 0.93                        |
| RTGH-95DVELN-1 (EcoNet® Included) | 11,000-199,900  | Indoor Direct Vent | 4                    | 85° to 140° F | 0.26/0.40                | 5.7                 | 8.5                 | 9.5      | 3/4                                      | 3/4 | 27-1/2 | 18-1/2 | 9-3/4 | 2", 3" or 4" PVC 2-Pipe | 82                 | 0.93                        |
| RTGH-95XLN-1                      | 11,000-199,900  | Outdoor            | 4                    | 85° to 140° F | 0.26/0.40                | 5.6                 | 8.5                 | 9.5      | 3/4                                      | 3/4 | 27-1/2 | 18-1/2 | 9-3/4 | N/A                     | 82                 | 0.93                        |
| RTGH-95XELN-1 (EcoNet® Included)  | 11,000-199,900  | Outdoor            | 4                    | 85° to 140° F | 0.26/0.40                | 5.6                 | 8.5                 | 9.5      | 3/4                                      | 3/4 | 27-1/2 | 18-1/2 | 9-3/4 | N/A                     | 82                 | 0.93                        |
| <b>Rheem Prestige® RTGH-90</b>    |                 |                    |                      |               |                          |                     |                     |          |  |     |        |        |       |                         |                    |                             |
| RTGH-90DVLN-1                     | 11,000-180,000  | Indoor Direct Vent | 3 - 4                | 85° to 140° F | 0.26/0.40                | 5.2                 | 7.7                 | 9.0      | 3/4                                      | 3/4 | 27-1/2 | 18-1/2 | 9-3/4 | 2", 3" or 4" PVC 2-Pipe | 82                 | 0.93                        |
| RTGH-90XLN-1                      | 11,000-180,000  | Outdoor            | 3 - 4                | 85° to 140° F | 0.26/0.40                | 5.2                 | 7.7                 | 9.0      | 3/4                                      | 3/4 | 27-1/2 | 18-1/2 | 9-3/4 | N/A                     | 82                 | 0.93                        |
| <b>Rheem Prestige® RTGH-84</b>    |                 |                    |                      |               |                          |                     |                     |          |  |     |        |        |       |                         |                    |                             |
| RTGH-84DVLN-1                     | 11,000-157,000  | Indoor Direct Vent | 3                    | 85° to 140° F | 0.26/0.40                | 4.6                 | 6.7                 | 8.4      | 3/4                                      | 3/4 | 27-1/2 | 18-1/2 | 9-3/4 | 2", 3" or 4" PVC 2-Pipe | 82                 | 0.93                        |
| RTGH-84XLN-1                      | 11,000-157,000  | Outdoor            | 3                    | 85° to 140° F | 0.26/0.40                | 4.5                 | 6.7                 | 8.4      | 3/4                                      | 3/4 | 27-1/2 | 18-1/2 | 9-3/4 | N/A                     | 82                 | 0.93                        |

\*Based on simultaneous showers using 2.5 GPM flow rate pre-mixed with cold water line. Flow rates vary depending on temperature of incoming cold water and water heater set temperature. Refer to flow rate curves for accurate sizing.

Uniform Energy Factor and Energy Factor based on Department of Energy (D.O.E.) requirements.

All models are available in Natural Gas and Propane (LP). For Propane replace the N with P when ordering.

SCAQMD 1146.2 compliant.

Factory set maximum temperature is 120° F. See Use and Care Manual for setting.

Consult factory for information on sizing the application.

Add a "C" to the model number when ordering Canadian models. Outdoor models are only for seasonal use in Canada. Please contact Rheem Canada Ltd. for details.

Vent Termination Kits are required for Direct Vent models. Contact your distributor for details.

Proper gas pressure must be ensured to supply tankless gas water heaters – up to 199,900 BTU/h for RTGH-95 models, up to 180,000 BTU/h for RTGH-90 models, up to 157,000 BTU/h for RTGH-84 models. (Consult your gas supplier)




### Maximum Vent Length (intake/outlet):

| NUMBER OF 90° ELBOWS | MAXIMUM LENGTH OF 2" STRAIGHT PIPE | MAXIMUM LENGTH OF 3" STRAIGHT PIPE | MAXIMUM LENGTH OF 4" STRAIGHT PIPE |
|----------------------|------------------------------------|------------------------------------|------------------------------------|
| 0 or 1               | 5.0 ft. (1.5 m)                    | 38.0 ft. (11.6 m)                  | 94.0 ft. (28.6 m)                  |
| 2                    | 3.5 ft. (1.0 m)                    | 36.5 ft. (11.1 m)                  | 88.0 ft. (26.8 m)                  |
| 3                    | 2.0 ft. (0.6 m)                    | 35.0 ft. (10.7 m)                  | 82.0 ft. (25.0 m)                  |
| 4                    | Not Available                      | 33.5 ft. (10.2 m)                  | 76.0 ft. (23.2 m)                  |
| 5                    | Not Available                      | 32.0 ft. (9.8 m)                   | 70.0 ft. (21.3 m)                  |
| 6                    | Not Available                      | 30.5 ft. (9.3 m)                   | 64.0 ft. (19.5 m)                  |

(ULC-S636 pipe must be used for Canada.)

| Model Number             | Temperature Rise (° F) |     |     |     |     |     |     |     |      |
|--------------------------|------------------------|-----|-----|-----|-----|-----|-----|-----|------|
|                          | 35°                    | 45° | 50° | 60° | 67° | 70° | 80° | 90° | 100° |
| RTGH-95 Water Flow (GPM) | 9.5                    | 8.5 | 7.7 | 6.4 | 5.7 | 5.5 | 4.8 | 4.3 | 3.8  |
| RTGH-90 Water Flow (GPM) | 9.0                    | 7.7 | 6.9 | 5.8 | 5.2 | 4.9 | 4.3 | 3.8 | 3.5  |
| RTGH-84 Water Flow (GPM) | 8.4                    | 6.7 | 6.0 | 5.0 | 4.6 | 4.3 | 3.8 | 3.3 | 3.0  |

Above estimates are for sizing purposes only.

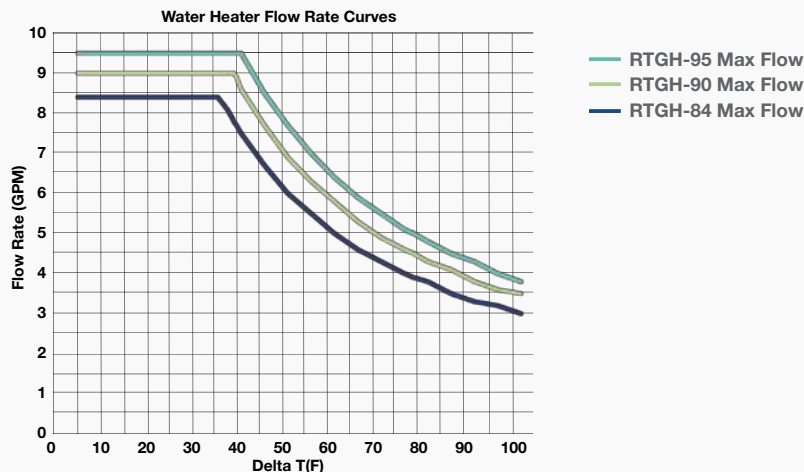

For more information on Tankless parts and accessories, see the Parts and Accessories Catalog or call 866-720-2076.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100  
Roswell, Georgia 30076 • 1.800.621.5622

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • 1.800.268.6966